


TACKABLE PANELS - FLAMESPEC®



High strength lightweight wood fiberboard core that is specially formulated to achieve a Class “A” Fire Rating.

- This product has earned the UL Classification Mark
- High strength, lightweight wood fiberboard
- Better machinability than other flame-retardant boards
- More tack ability and less brittle

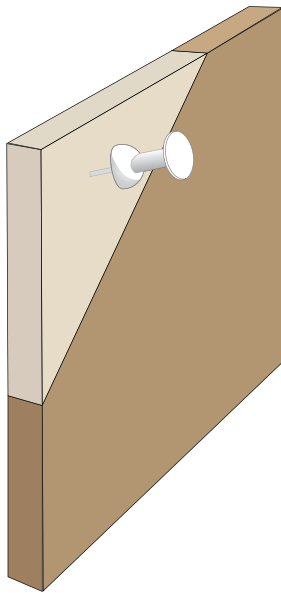

Thickness (in./±.051 in.)	.500
Weight (lb./msf)	703
Density (lb./ft. ³)	16.5
Transverse Strength (lb.)	14
Tensile Strength (lb./in. ²)	213

Superior design and flame resistance sets FLAMESPEC® panels apart.

For offices, schools, and other commercial applications with stringent fire ratings, specify FLAMESPEC®: the leading flame-retardant tackable fiberboard.

No other competitive product, mineral fiber or fiberglass panels - offers you all the features and benefits of FLAMESPEC® panels.

	Coated Face	Back Surface
Flame Spread	20	285-305
Smoke Developed	30	65

Finishes

Select from Vertical Wall Solution approved panel fabrics. C.O.M accepted after approval of suitability.

Mounting Methods

- Adhesive and finish nails
- Hook and loop fasteners
- Z-clip attachments
- Concealed edge clips

Fire Rating

All panel components meet or exceed Class “A” requirements as determined by ASTM E-84 Tunnel Test.

Warranty

All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.